


PATH LIGHT

12V MR16 35W 8W LED

MODEL XP-5

Specification-grade landscape lighting for path or area lighting applications.

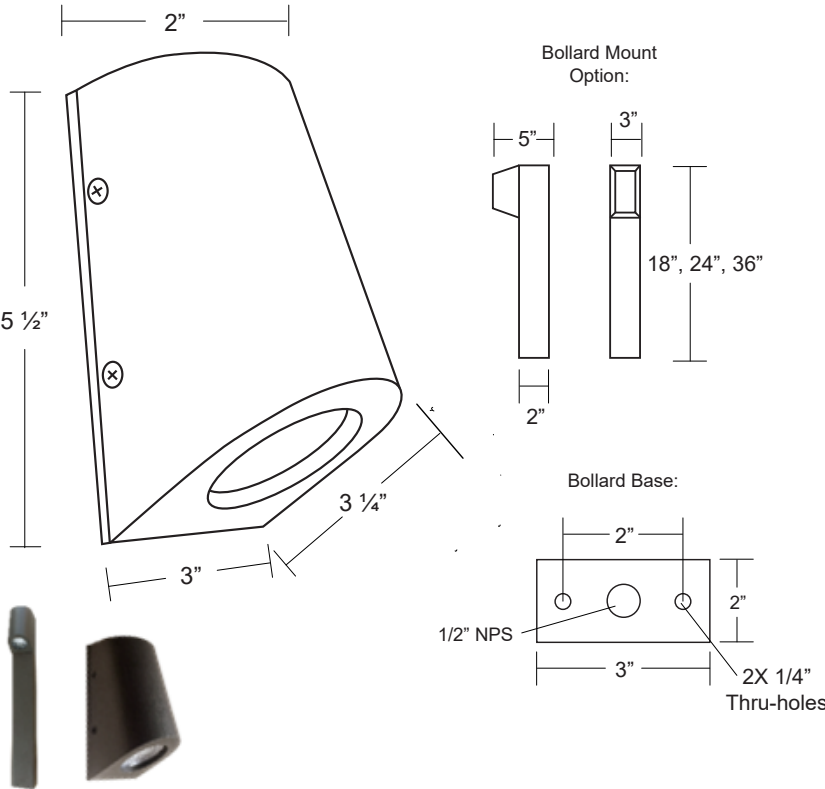

- Cast/machined aluminum materials.
- Standard TGIC powder coat finishes available.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Three post heights: 18", 24", 36" (optional)
- Spread lens provide optics for wide distribution.
- Fixed aiming angle of 12° from horizontal.
- Mounting plate fits single gang junction box.
- ETL listed for wet location use.
- Warranty: 10 Years.



Specifications:

MODEL:	XP-5	FINISH	
MATERIAL:	Cast/Machined Aluminum	BLK - Black	BZT - Bronze Texture
VOLTAGE:	12V	BZN - Bronze	BKBZ - Black Bronze
WATTAGE:	35 att		
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		

Ordering Logic:

MODEL	OPTION	POST HEIGHT	FINISH	
XP-5	0 - None BM - Bollard Mount	0 - none 18 - 18" 24 - 24" 36 - 36"	BLK - Black BZN - Bronze	BZT - Bronze Texture BKBZ - Black Bronze

EXAMPLE: XP - 5 - BM - 18 - BZN

PROJECT

TYPE

X-Light, Inc.