


FLOOD/ACCENT LIGHT

12V MR16 35W 8W LED

MODEL XF-3

Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. For ground mounted, tree mounted or surface-mounted installations.

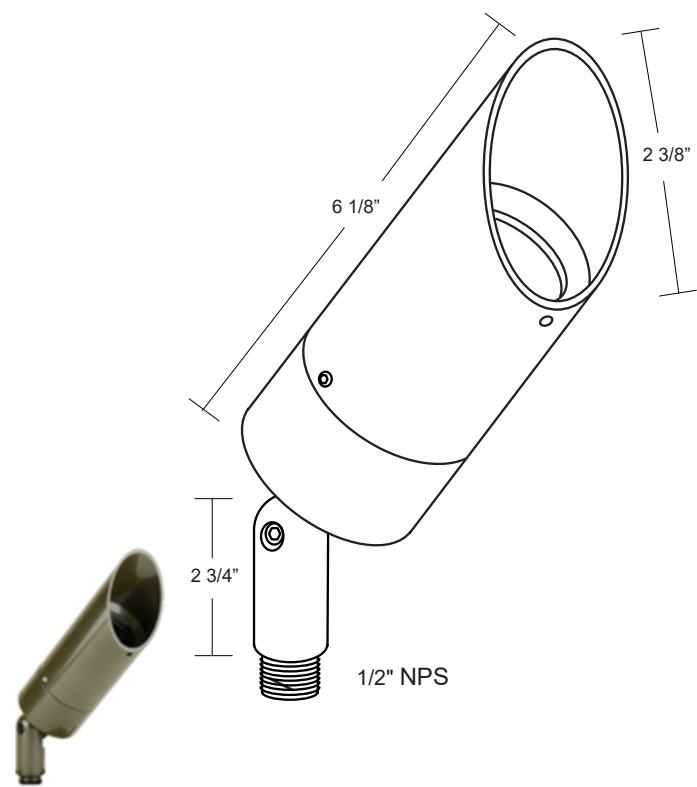

- CNC machined 6061-T6 copper-free aluminum.
- Five standard TGIC powder coat finishes available.
- Remote transformer required.
- Stainless steel hardware.
- 2' of 18/2 LV wire leads.
- 45° angled cap for glare control holds 2 lens accessories.
- Mount not included.
- Clear tempered borosilicate glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water lintrusion.
- ETL listed for wet location.
- Warranty: 10 Years.



Specifications

MODEL:	XF - 3		
MATERIAL:	6061-T6 Aluminum		
VOLTAGE:	12V		
WATTAGE:	35 Watt	FINISHES:	BLK - Black BZT - Bronze Texture BZN - Bronze BKBZ - Black Bronze WHT - White
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		

Ordering Logic:

MODEL	METAL	FINISH	
XF - 3	A - Aluminum	BLK - Black BZN - Bronze WHT - White	BZT - Bronze Texture BKBZ - Black Bronze

EXAMPLE: XF - 3 - A - BZT

PROJECT	X-Light, Inc.
TYPE	