

PATH LIGHT


12V

MR8


20W

MODEL XP-12

Specification-grade landscape lighting for path or garden lighting applications.

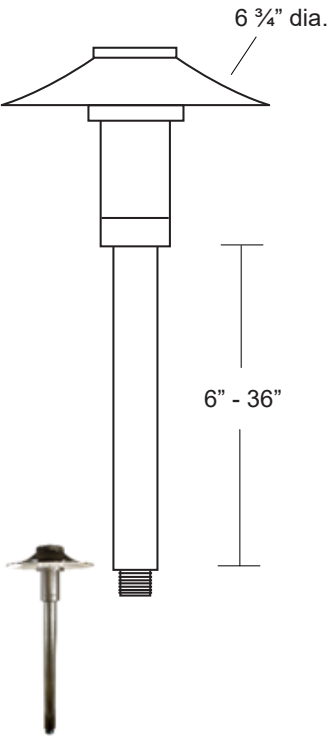

- Machined aluminum, available in standard TGIC powder coat finishes.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Shade diameter of 6 3/4".
- Stems lengths of 6" - 36" available. Mount not included.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- ETL listed for wet location use.
- Warranty: Aluminum: 10 Years, Brass/Copper: 25 Years.

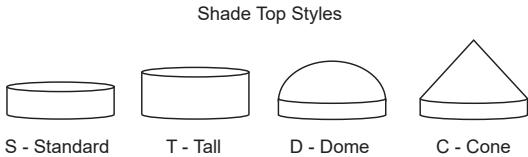

Specifications

MODEL:	XP-12
MATERIAL:	Machined Aluminum, Brass or Copper
VOLTAGE:	12V
WATTAGE:	20 Watt
SOCKET:	G4 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.

Ordering Logic:

MODEL	METAL	SHADE TOP	STEM LENGTH		FINISH	
XP-12	A - Aluminum	S - Standard	6 - 6"	18 - 18"	BLK - Black	BZT - Bronze Texture
		T - Tall	9 - 9"	24 - 24"	BZN - Bronze	BKBZ - Black Bronze
		D - Dome	12 - 12"	30 - 30"		
		C - Cone	36 - 36"			

EXAMPLE: XP - 12 - A - D - 12 - BZT

PROJECT

TYPE

X-Light, Inc.