
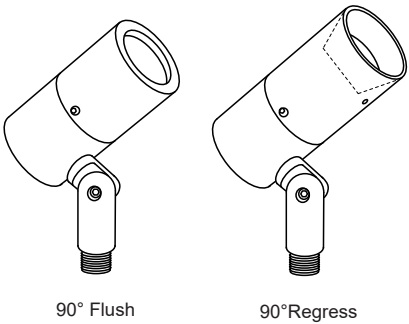


PATH LIGHT

12V MR16 50W 8W LED

MODEL XP-6

Specification-grade landscape lighting for path or garden lighting applications.

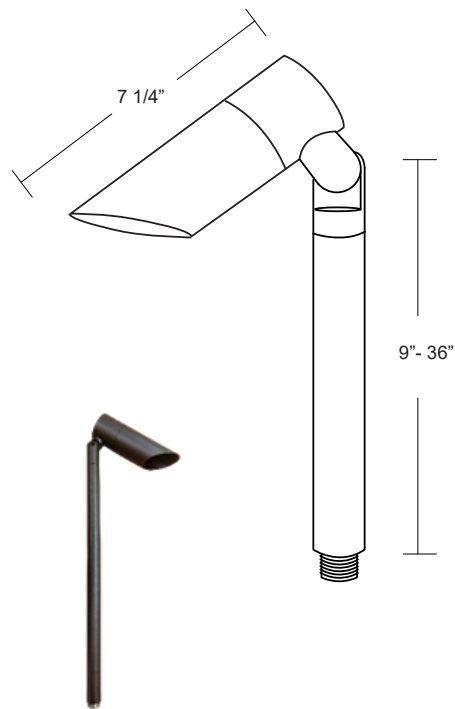

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Standard TGIC powder coat finishes.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 16/2 low voltage cable supplied.
- Three cap styles from which to choose.
- Stems lengths of 9" - 36" available.
- Adjustable or fixed mounting. (see MT-1 and MT-2)
- Clear tempered borosilicate glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- ETL listed for wet location use.
- Warranty: 10 Years.



Specifications:

MODEL:	XP-6	FINISHES:	BLK - Black	BZT - Bronze Texture
MATERIAL:	6061-T6 Aluminum		BZN - Bronze	BKBZ - Black Bronze
VOLTAGE:	12V			
WATTAGE:	50 Watt			
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	CAP	STEM LENGTH		FINISH	
XP-6	A - Aluminum	1 - Flush	9 - 9"	24 - 24"	BLK - Black	BZT - Bronze Texture
		2 - Regress	12 - 12"	30 - 30"	BZN - Bronze	BKBZ - Black Bronze
		3 - 45 Degree	18 - 18"	36 - 36"		

EXAMPLE: XP - 6 - A - 1 - 12 - BZT

PROJECT

TYPE

X-Light, Inc.