


PATH LIGHT

12V T4 35W 5W LED

MODEL XP-8

Specification-grade landscape lighting for path or garden lighting applications.

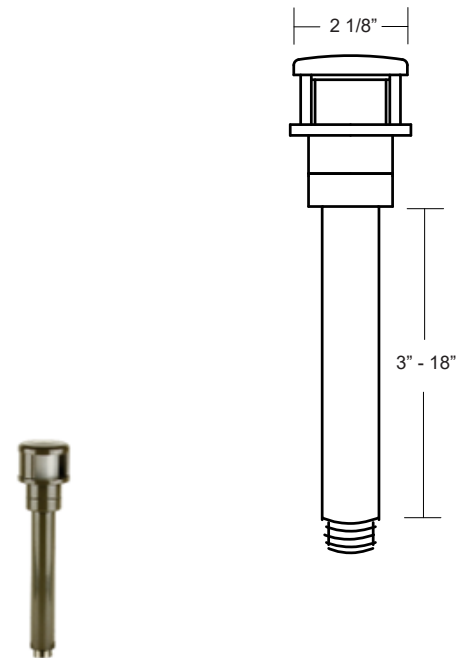

- Machined 6061-T6 copper-free aluminum.
- Standard TGIC powder coat finishes available.
- Remote transformer required.
- Stainless steel hardware. 6 feet of 18/2 low voltage cable supplied.
- Stems lengths of 3" - 18" available. Mount not included.
- Frosted borosilicate glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- ETL listed for wet location use.
- Warranty: 10 Years.



Specifications

MODEL:	XP-8	FINISHES:	BLK - Black	BZT - Bronze Texture
MATERIAL:	Machined Aluminum		BZN - Bronze	BKBZ - Black Bronze
VOLTAGE:	12V			
WATTAGE:	35 Watt			
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	STEM LENGTH		LENS STYLE	OPENING SIZE	FINISH	
XP-8	A - Aluminum	0 - none	9 - 9"	F - Frosted	90 - 90 degrees 120 - 120 degrees	BLK - Black	BZT - Bronze Texture
		3 - 3"	12 - 12"			BZN - Bronze	BKBZ - Black Bronze
		6 - 6"	18 - 18"				

EXAMPLE: XP - 8 - A - 12 - F - 90 - BZT

PROJECT

TYPE

X-Light, Inc.