


12V MR16 35W 8W LED

MODEL XN-2

Specification-grade direct burial landscape lighting, wet-location luminaire for uplighting applications.

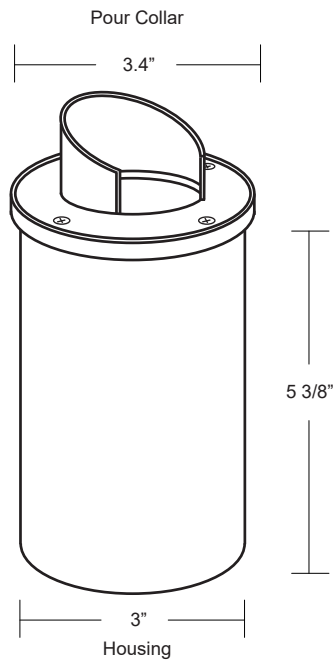

- Machined 6061-T6 copper-free aluminum. Standard TGIC powder coat finishes available.
- Remote transformer required.
- GY 6.35 bi pin porcelain socket.
- IP 67 rated.
- Two glare shield heights available.
- Tempered glass lens.
- Holds 2 lens accessories.
- Pour collar option available.
- 6 feet of 16/2 low voltage cable supplied.
- Warranty: 10 Years.



Specifications:

MODEL:	XN-2	FINISHES:	BLK - Black	BZT - Bronze Texture
MATERIAL:	6061-T6 Aluminum		BZN - Bronze	BKBZ - Black Bronze
VOLTAGE:	12V			
WATTAGE:	35 Watt			
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	CUTOFF SIZE	POUR COLLAR	FINISH	
XN - 2	A - Aluminum	S - Short (1") T - Tall (1 1/2")	0 - None (standard) PC - Pour Collar (optional)	BLK - Black BZN - Bronze	BZT - Bronze Texture BKBZ - Black Bronze

EXAMPLE: XN - 2 - A - T - 0 - BLK

PROJECT

TYPE

X-Light, Inc.