


12V MR16 35W 8W LED

MODEL XN-5

Specification-grade direct burial landscape lighting, wet-location luminaire for up lighting applications.

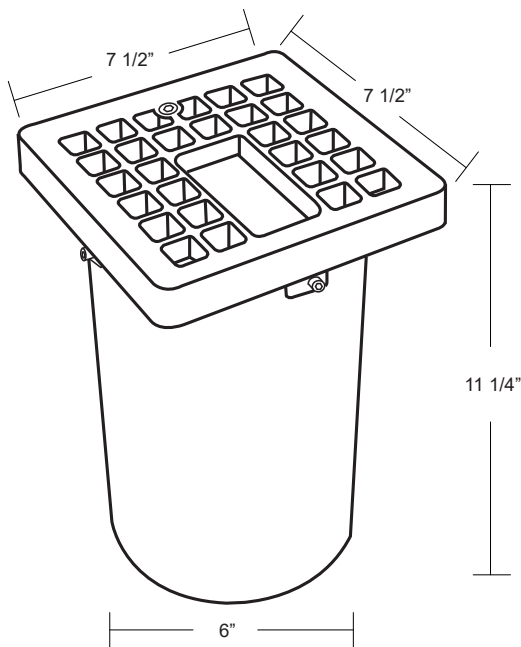

- Cast bronze frame and grate. Standard TGIC powder coat finishes and two bronze finishes.
- Remote transformer required.
- GY 6.35 bi pin porcelain socket.
- Hot-aiming option available.
- IP 68 rated.
- 18 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- ABS housing: 6"dia. x 10 1/2" OAL.
- Tempered glass lens.
- Holds 2 lens accessories.
- Suitable for drive-over installations.
- 6 feet of 16/2 low voltage cable supplied.
- Warranty: 25 Years.



Specifications:

MODEL:	XN - 5	FINISHES:	BLK - Black BZN - Bronze	BZT - Bronze Texture BKBZ - Black Bronze DBZ - Dark Bronze
MATERIAL:	Cast Bronze			
VOLTAGE:	12V			
WATTAGE:	35 Watt			
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	AIMING	FIXTURE REGRESS	FINISH	
			*Standard Aiming only		
XN - 5	B - Bronze	S - Standard H - Hot Aim	1 - 1 3/4" 2 - 3" (standard) 3 - 4 1/4" (hot-aim)	BLK - Black BZN - Bronze	BZT - Bronze Texture BKBZ - Black Bronze DBZ - Dark Bronze

EXAMPLE: XN - 5 - B - H - 1 - BLK

PROJECT

TYPE

X-Light, Inc.