


FLOOD/ACCENT LIGHT 12V MR16 35W 8W LED MODEL XF- 4

Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. For ground mounted, tree mounted or surface-mounted installations.



- CNC machined 6061-T6 copper-free aluminum.
- Five standard TGIC powder coat finishes available.
- Remote transformer required.
- Stainless steel hardware.
- 2' of 18/2 LV wire leads.
- 60° angled cap for glare control holds 3 lens accessories.
- Mount not included.
- Clear tempered borosilicate glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water intrusion.
- ETL listed for wet location.
- Warranty: 10 Years.

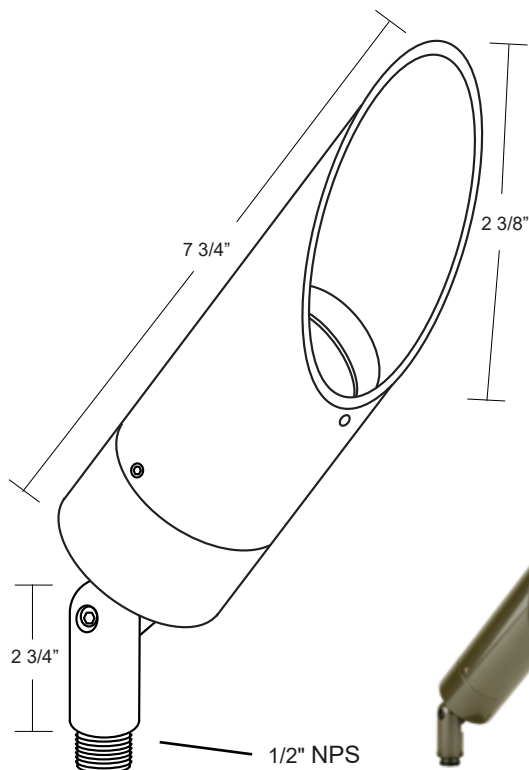

Specifications

MODEL:	XF - 4	FINISHES:	BLK - Black	BZT - Bronze Texture
MATERIAL:	6061-T6 Aluminum or C36000 Brass		BZN - Bronze	BKBZ - Black Bronze
VOLTAGE:	12V		WHT - White	
WATTAGE:	35 Watt			
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	FINISH	
XF - 4	A - Aluminum B - Brass	BLK - Black BZN - Bronze WHT - White	BZT - Bronze Texture BKBZ - Black Bronze

EXAMPLE: XF - 4 - A - BZT

PROJECT

TYPE

X-Light, Inc.