


DOWNLIGHT

12V 35W MR16 8W LED

MODEL XR-1

Specification-grade landscape lighting, wet-location luminaire for downlighting applications.

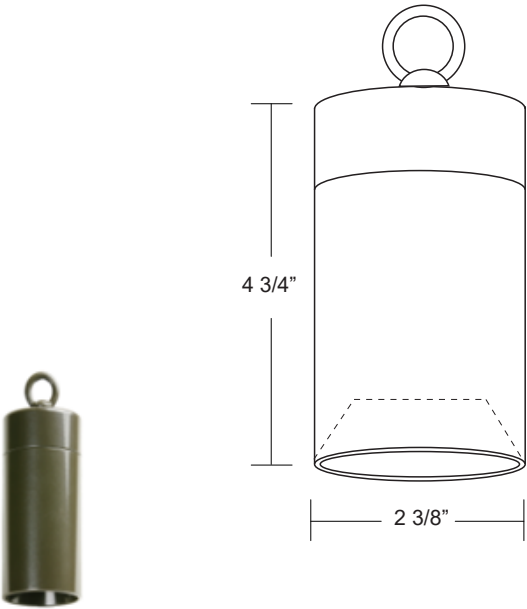

- CNC machined 6061-T6 copper-free aluminum.
- Five standard TGIC powder coat finishes available.
- Remote transformer required.
- Stainless steel hardware.
- 1" brass loop for mounting.
- 12" 18 ga. shrink tube covered, black wire leads.
- 3/4" regressed cap for glare control holds 2 lens accessories.
- Clear tempered borosilicate glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water intrusion.
- ETL listed for wet location.
- Warranty: 10 Years.



Specifications

MODEL:	XR - 1	FINISHES:	BLK - Black	BZT - Bronze Texture
MATERIAL:	6061-T6 Aluminum		BZN - Bronze	BKBZ - Black Bronze
VOLTAGE:	12V		WHT - White	
WATTAGE:	35 Watt			
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	CABLE		FINISH	
XR - 1	A - Aluminum	0 - None	20 - 20 ft	BLK - Black	BZT - Bronze Texture
		5 - 5 ft	25 - 25 ft	BZN - Bronze	BKBZ - Black Bronze
		10 - 10 ft	30 - 30 ft	WHT - White	
		15 - 15 ft			

EXAMPLE: XR - 1 - A - 0 - BLK

PROJECT

TYPE

X-Light, Inc.